



FRONT VIEW

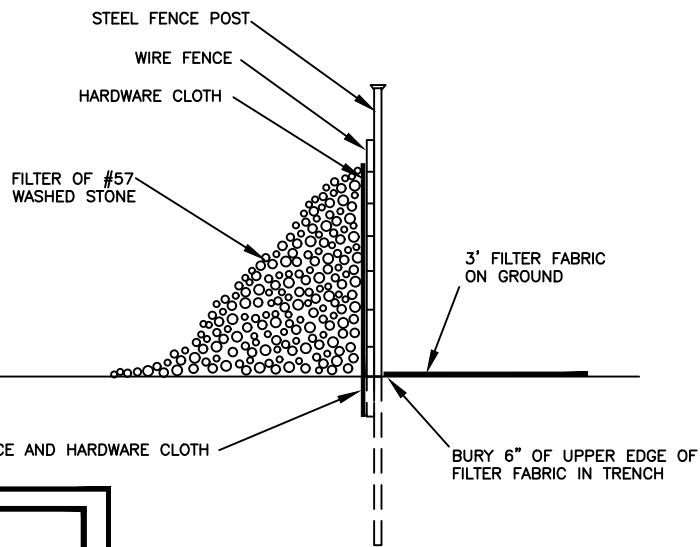

SECTION VIEW

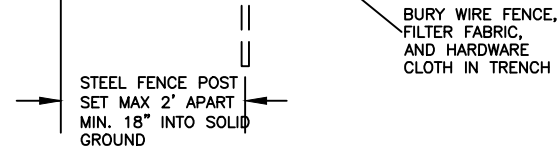

NOTES:

1. REMOVE SEDIMENT WHEN HALF OF STONE OUTLET IS COVERED.
2. REPLACE STONE AS NEEDED TO ENSURE DEWATERING.



EFFECTIVE: 01/31/08

STANDARD SILT FENCE OUTLET